

## NOTES:

1. FILLET WELD ALL AROUND.
2. MATERIAL: TOOL STEEL .25 AISI/O1, AISI/O6, AISI/A2, AISI/D2, AISI/St, AISI/W1, AISI/W2 OR EQUIVALENT.
3. BREAK ALL SHARP EDGES. VISUAL INSPECTION IS SATISFACTORY.
4. QUANTITY: 2 EACH.

900G6910125-101---  
9P91-020

Figure 2. T306 Input/Lube Pump Drive T-Bolt Assembly - Field Fabricated

**91-10-00**

Page 3  
Revision 2

MD

CSP-900IPL-4


JUL-26-1995 15:45

COM'L FIELD SERVICE

P.05

RELEASED FOR PROD.  
DATE: 4/28/10 INT: EMD

# ILLUSTRATED PARTS LIST

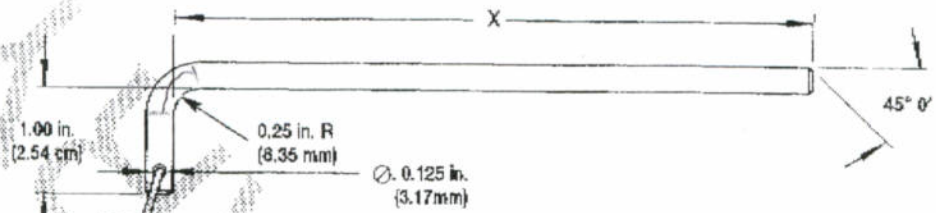


SHOP COPY

3/8 - 5.88 in. (14.93 cm)  
\* add 1/4" To each pin +  
cut To length after Bending W.P.

QUANTITY	"X"	ITEM CALLOUT	DESCRIPTION
2	1.50 in. (3.81 cm)	1	RIG PIN
2	2.50 in. (6.35 cm)	2	RIG PIN
2	2.75 in. (6.99 cm)	3	RIG PIN
1	3.75 in. (9.52 cm)	4	RIG PIN
1	4.00 in. (10.16 cm)	5	RIG PIN
1	5.00 in. (12.70 cm)	6	RIG PIN
1	6.00 in. (15.24 cm)	7	RIG PIN
A/R	NAS 1756 12	8	RED FLAG

REMOVE BEFORE FLIGHT

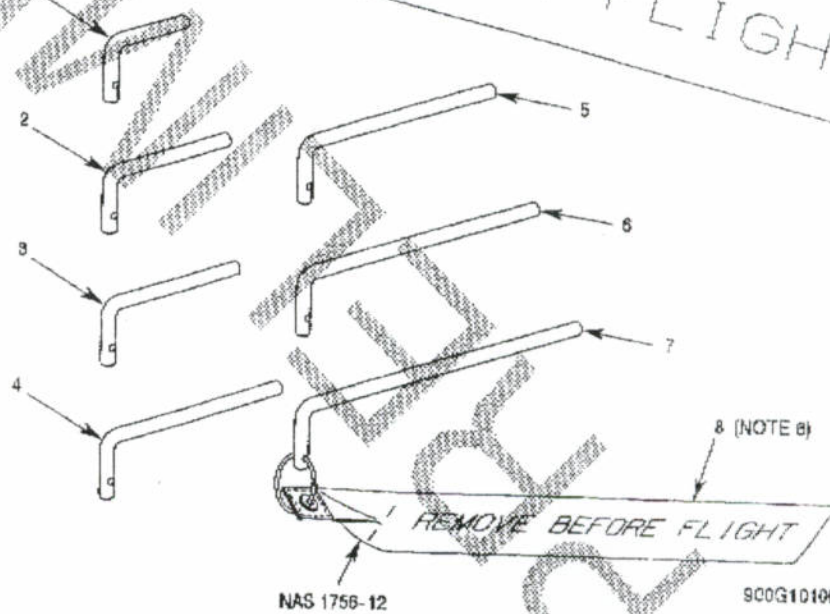

- NOTES:
1. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI V14.5M-1982.
  2. BREAK ALL SHARP EDGES.
  3. MAKE FROM CRES 304 ROD SPC QQ-S-753 COND A; DIA 0.25 OR EQUIVALENT.
  4. ATTACH STREAMER TO RIG PIN USING SUITABLE CABLE AND SWAGES.
  5. PLACE ALL RIG PINS WITH STREAMERS IN A SUITABLE FABRIC POUCH.
  6. CAN BE PURCHASED FROM: AVIBANK MFG., INC., PHOENIX, AZ 85016

Figure 3. T501 Flight Control Rig Pins - Field Fabricated

RB 900 6 10/0006


MD

91-10-00

COM'L FIELD SERVICE

CSP-900/PL-4

1517

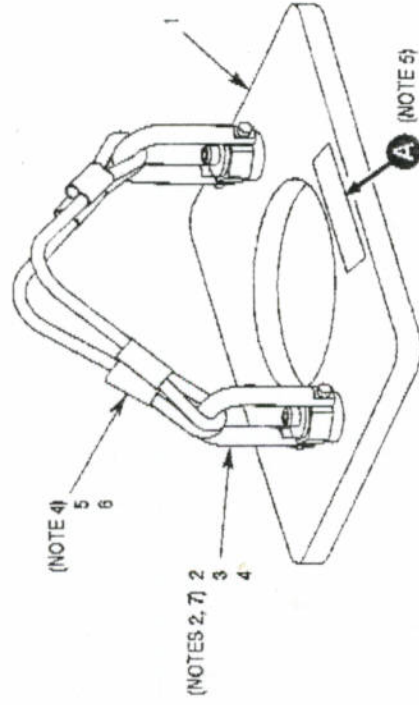

WARNING !  
DO NOT USE TO LIFT HELICOPTER  
OR ENTIRE ROTOR SUPPORT SYSTEM.

QUANTITY	STOCK SIZE	ITEM CALLOUT	DESCRIPTION
1	50 x 7.0 x 9.0	1	PLATE
2	CL-606-SHR	2	HOIST RING
2	MS5539T-45	3	WASHER
2	CL-5-IN	4	NUT
2	250 x 15	5	CABLE
4	MS51844-23	6	SLEEVE


500G1401010-101-----  
9P91-025

Tool - Field Fabricated  
91-10-00

Page 5  
Revision 2





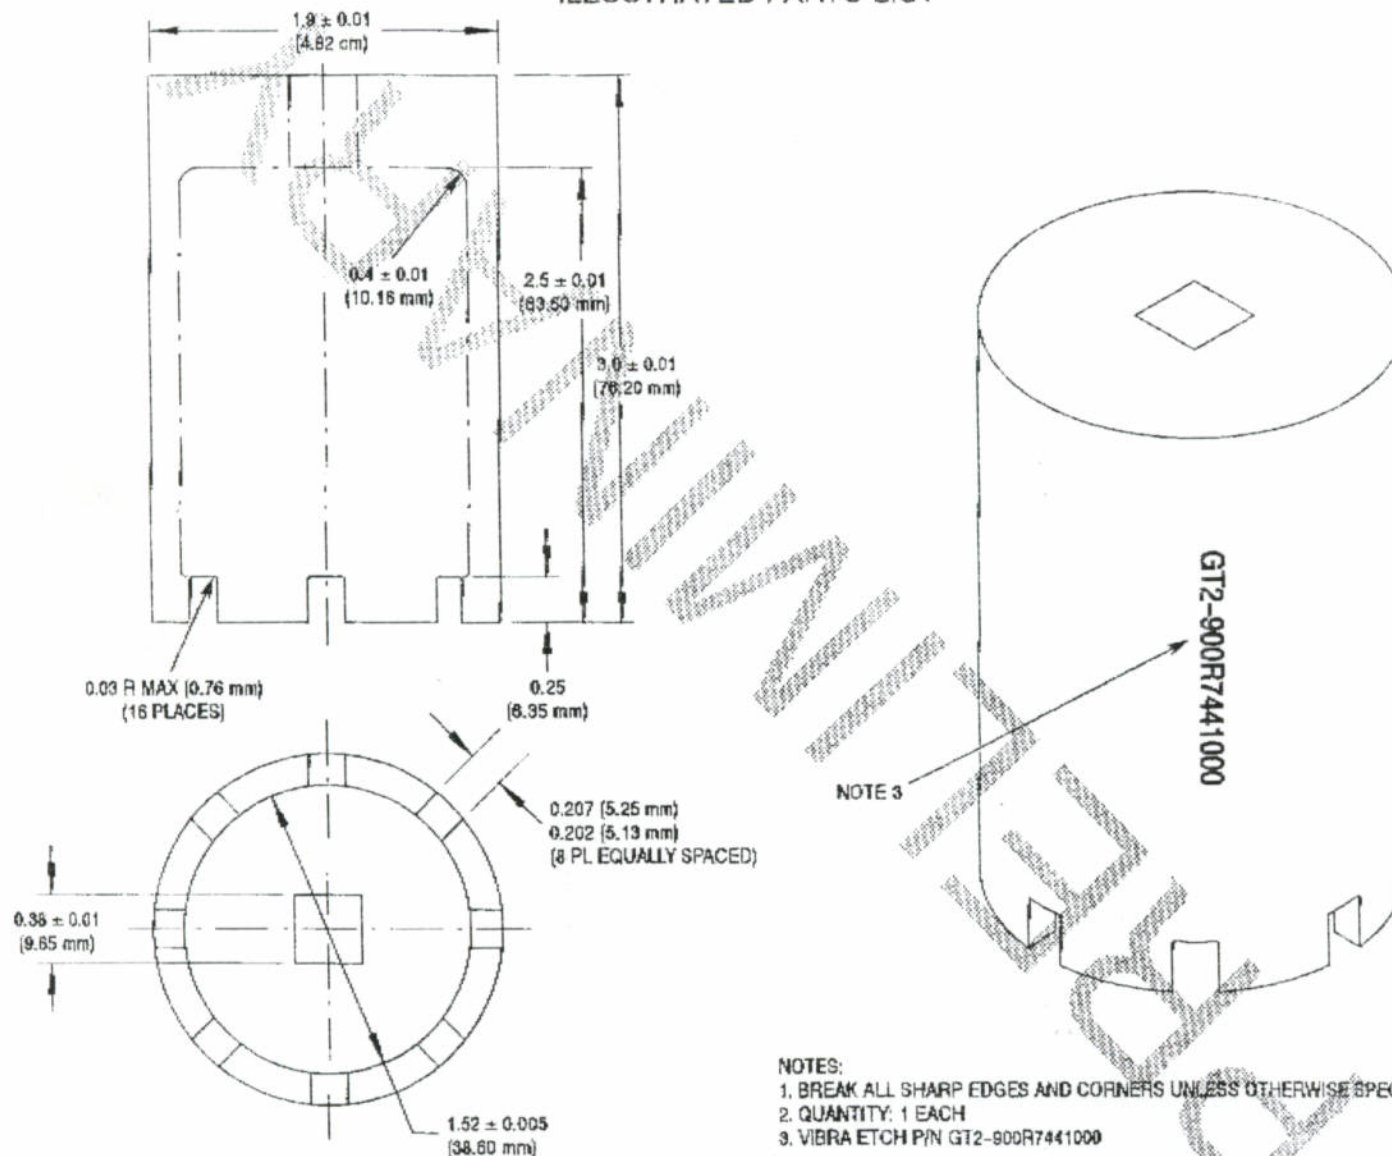

RB GT2-900R7441000

Figure 6. T603 Drive Shaft Nut Torque Socket - Field Fabricated

91-10-00

Page 7  
Revision 2


RELEASED FOR PROD.  
DATE: 4/28/10 INT: blue

JUL-26-1995 15:47

COM'L FIELD SERVICE

P.09

SHOP COPY

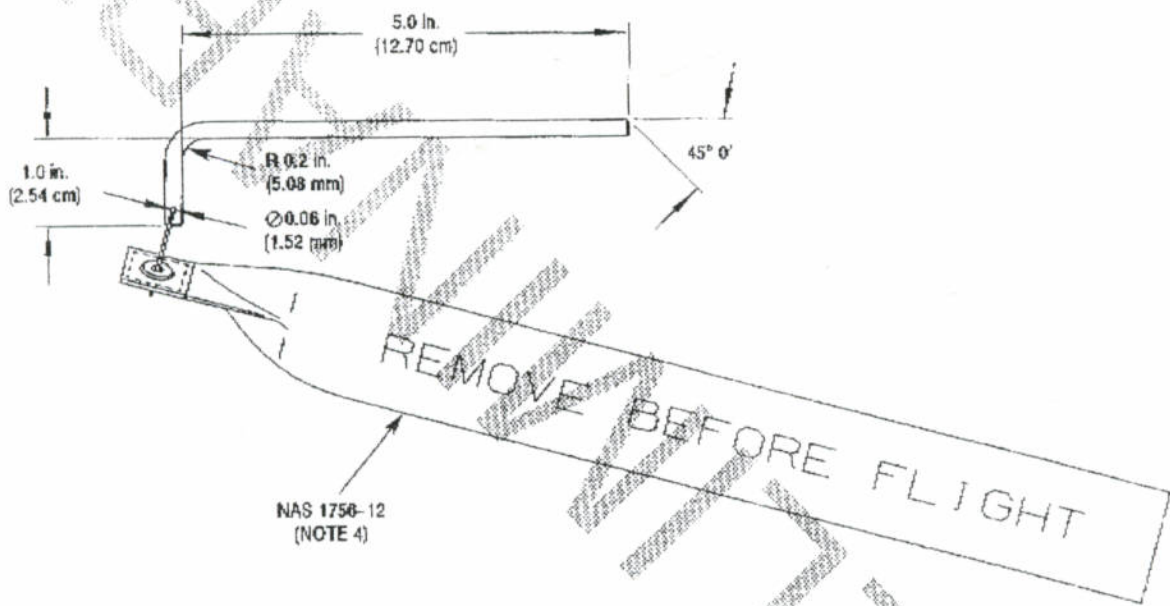

NOTES:


1. BREAK ALL SHARP EDGES.
2. MAKE FROM CRES 304 ROD SPEC QQ-S-783 COND A, DIA 0.187 IN. OR EQUIVALENT.
3. ATTACH STREAMER TO RIG PIN USING SUITABLE CABLE AND SWAGES.
4. CAN BE PURCHASED FROM: AVIBANK MFG., INC., PHOENIX, AZ 85016.
5. QUANTITY: 1 EACH.

RB 900G 8930001

Figure 7. T405 Engine Control Rig Pin - Field Fabricated

91-10-00

900G8893082  
8P91-029

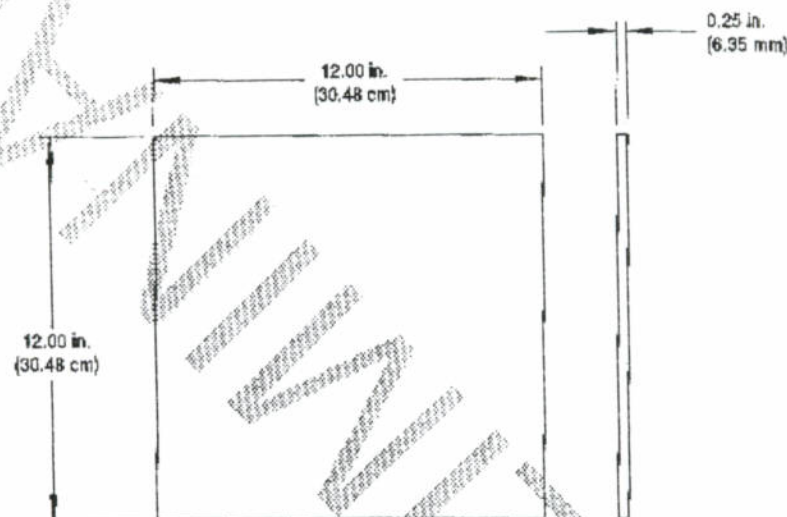

RB 900623000102-1

## NOTES:

1. MATERIAL: STEEL OR ALUMINUM, TOOLING GRADE
2. USE MIL-L-7808 OR SUITABLE GREASE COMPOUND BETWEEN GREASE PLATES.
3. QUANTITY: TWO EACH


BP01-030

Figure 8. T206 Forward Jack Pad Grease Plate - Field Fabricated

91-10-00

Page 9  
Revision 2



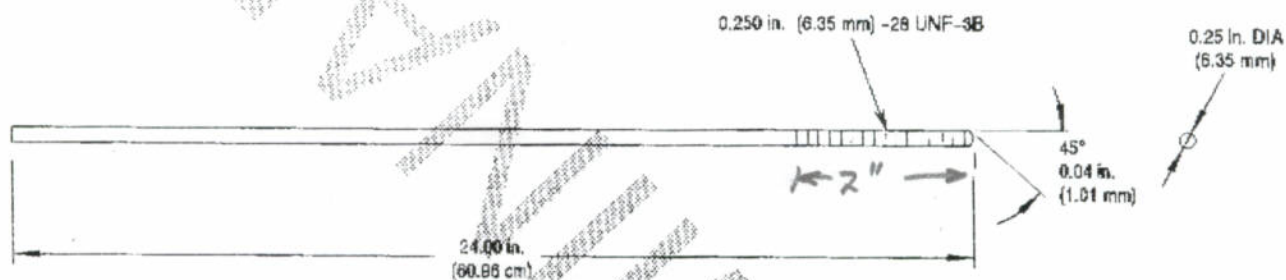

## NOTES:

1. MAKE FROM TOOL STEEL 0.25 DIA.  
AISI/O1; AISI/O8; AISI/A2; AISI/D2; AISI/S1; AISI/W1; AISI/W2 OR EQUIVALENT.
2. BREAK ALL SHARP EDGES.
3. QUANTITY: 4 EACH.

RB AFT1-900P7661000

AFT1-900P7661000  
9P91-031

Figure 9. T801 Fuel Cell Rod - Field Fabricated

91-10-00

Page 10  
Revision 2

Explorer



## ILLUSTRATED PARTS LIST


CSF 200PL-4

JUL-26-2017

781

## NOTE:

1. MAKE FROM CHIP CHASER, OR ANY 0.020 INCH (0.508 mm) THICK SPRING STEEL [2 EACH].

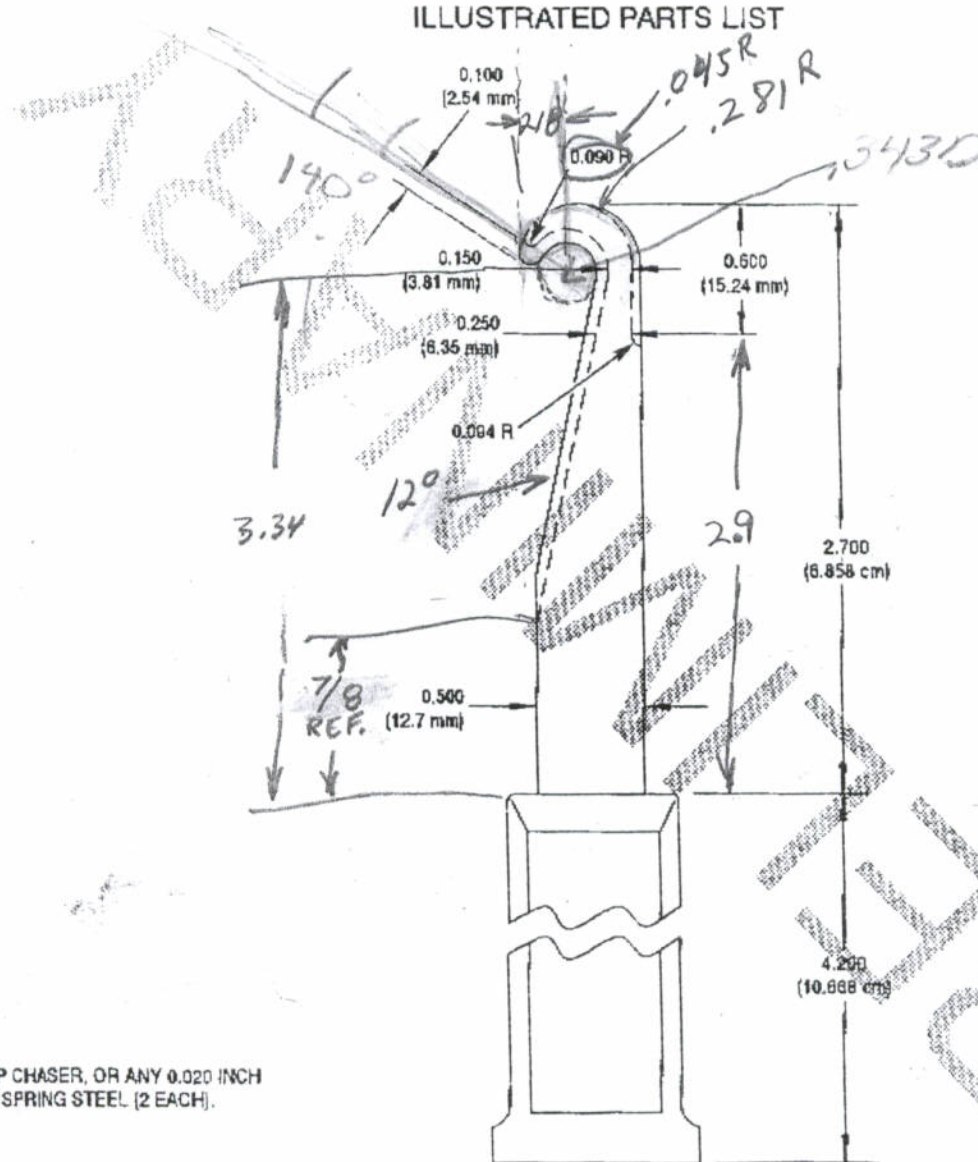RB T907

FILE COPY

800-  
9P31-034

Figure 11. T907 Main Rotor Hub Bearing Removal Tool - Field Fabricated


91-10-00

Page 12  
Revision 2


"CHIPMASTER"

P1584 MOC


ILLUSTRATED PARTS LIST

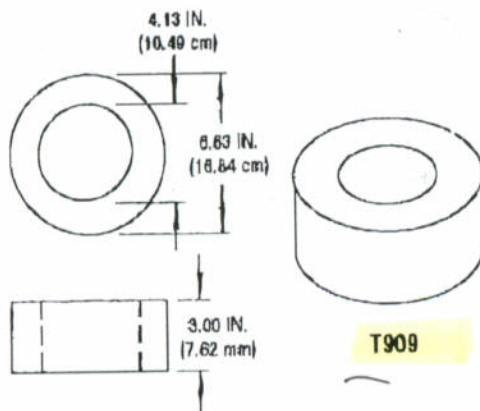

UPPER SEAL INSTALLATION TOOL

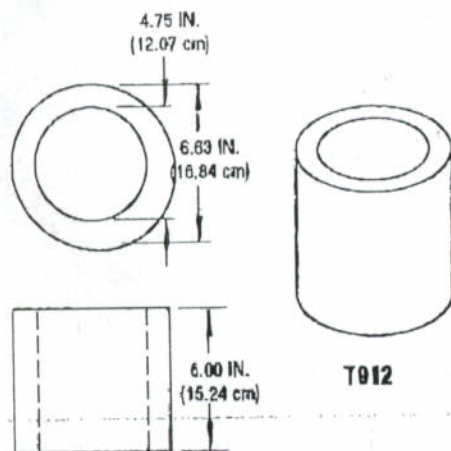

UPPER BEARING OUTER RACE INSTALLATION TOOL

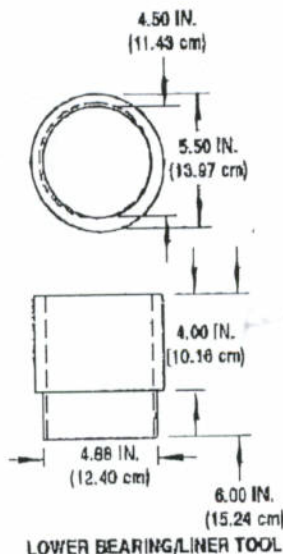

LOWER BEARING/LINER TOOL



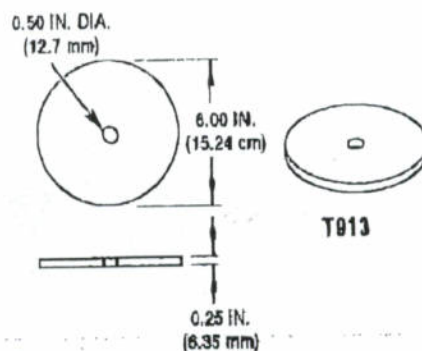


PLATE TOOL

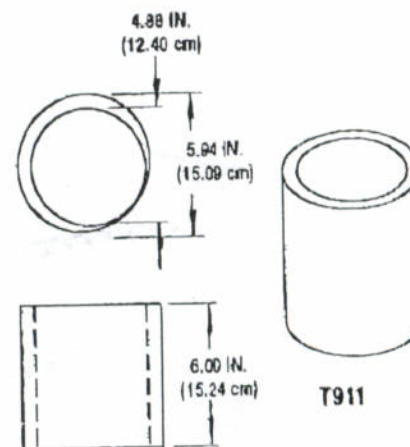

LOWER BEARING OUTER RACE INSTALLATION TOOL

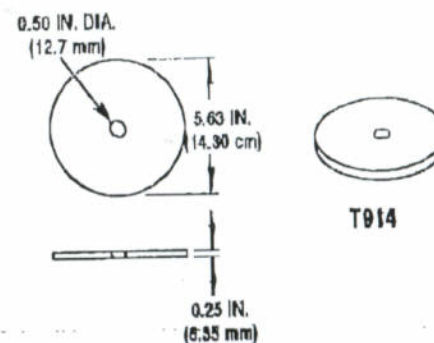

CENTER SEAL TOOL

0P91-040-1

Figure 17. Main Rotor Hub Details - Removal / Installation Tools (Sheet 1 of 2)



RELEASED FOR PROD.

DATE: 5/18/07 INT: Dew

7/8/08 DG  
8-10-11 SL

91-10-00

MD RB T909

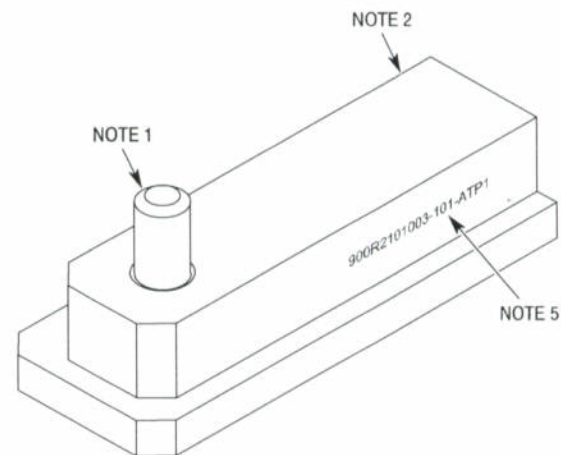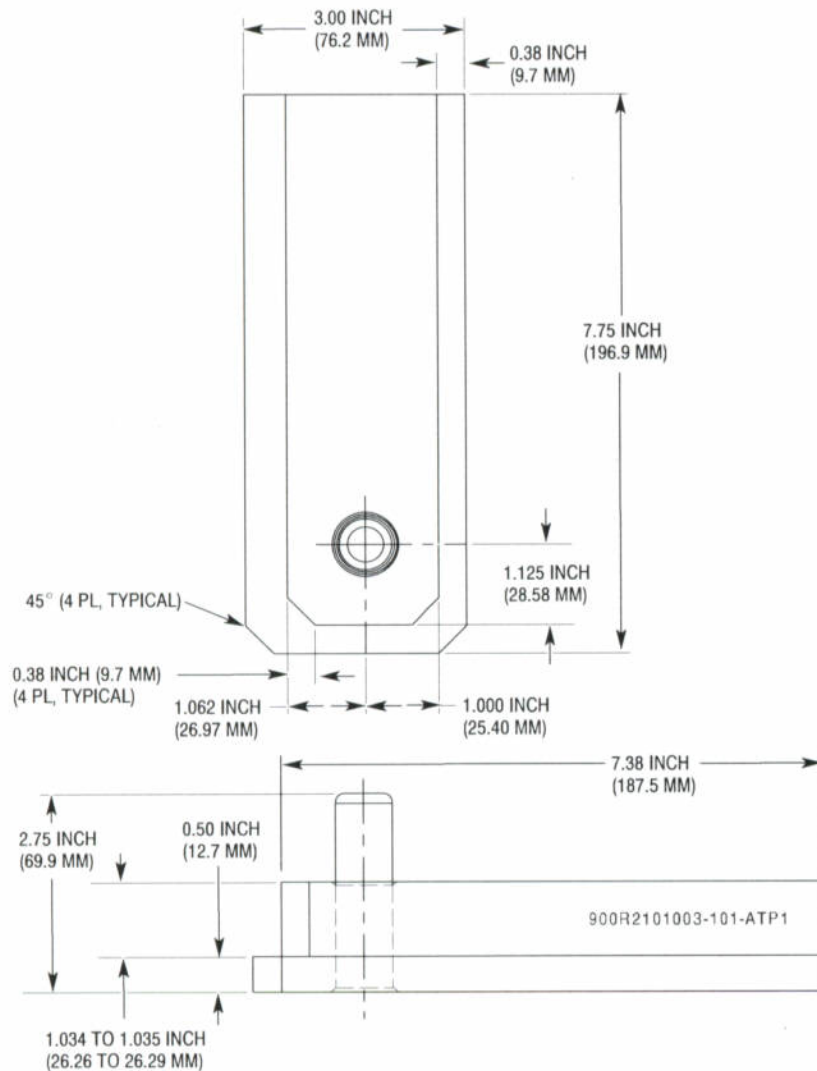


## NOTES:

1. MAKE PIN FROM CRES OR EQUIVALENT  $\varnothing$  0.75 INCH [19.1 MM] BY 2.75 INCH [69.9 MM] LONG), PRESS FIT INTO BODY, AND SLIP FIT, NO-SHAKE CONDITION W/ BUSHING 900R2101128-101.
2. MAKE BODY FROM ALUM 6061-T6 OR EQUIVALENT.
3. DEBURR AND BREAK ALL SHARP EDGES AND BEAD OR GLASS BLAST TOOL.
4. ANODIZE BLUE AFTER MACHINING. ALL DIMENSIONS APPLY AFTER ANODIZE.
5. VIBRA ETCH 0.25 INCH (6.4 MM) HIGH BLOCK FONT LETTER APPROX. LOCATION SHOWN OR EQUIVALENT.
6. USAGE: HOLD FLEXBEAM WEAR SHIM IN PLACE WHILE ADHESIVE DRIES.

9P91-047A


Figure 17. T908 Flexbeam Wear Shim Installation Tool – Upper and Lower Hub

**91-10-00**Page 19  
Revision 18




T909  
484.00

UPPER SEAL INSTALLATION TOOL

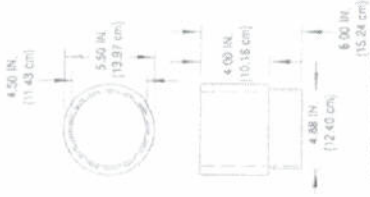

T910  
335.00


LOWER BEARING/LINER TOOL



483.00


T911

LOWER BEARING OUTER RACE INSTALLATION TOOL




T912  
515.00  
New

UPPER BEARING OUTER RACE INSTALLATION TOOL



T913

PLATE TOOL



T914

CENTER SEAL TOOL

9991-040-1

Figure 18. Main Rotor Hub Details – Removal / Installation Tools (Sheet 1 of 3)  
**91-10-00**





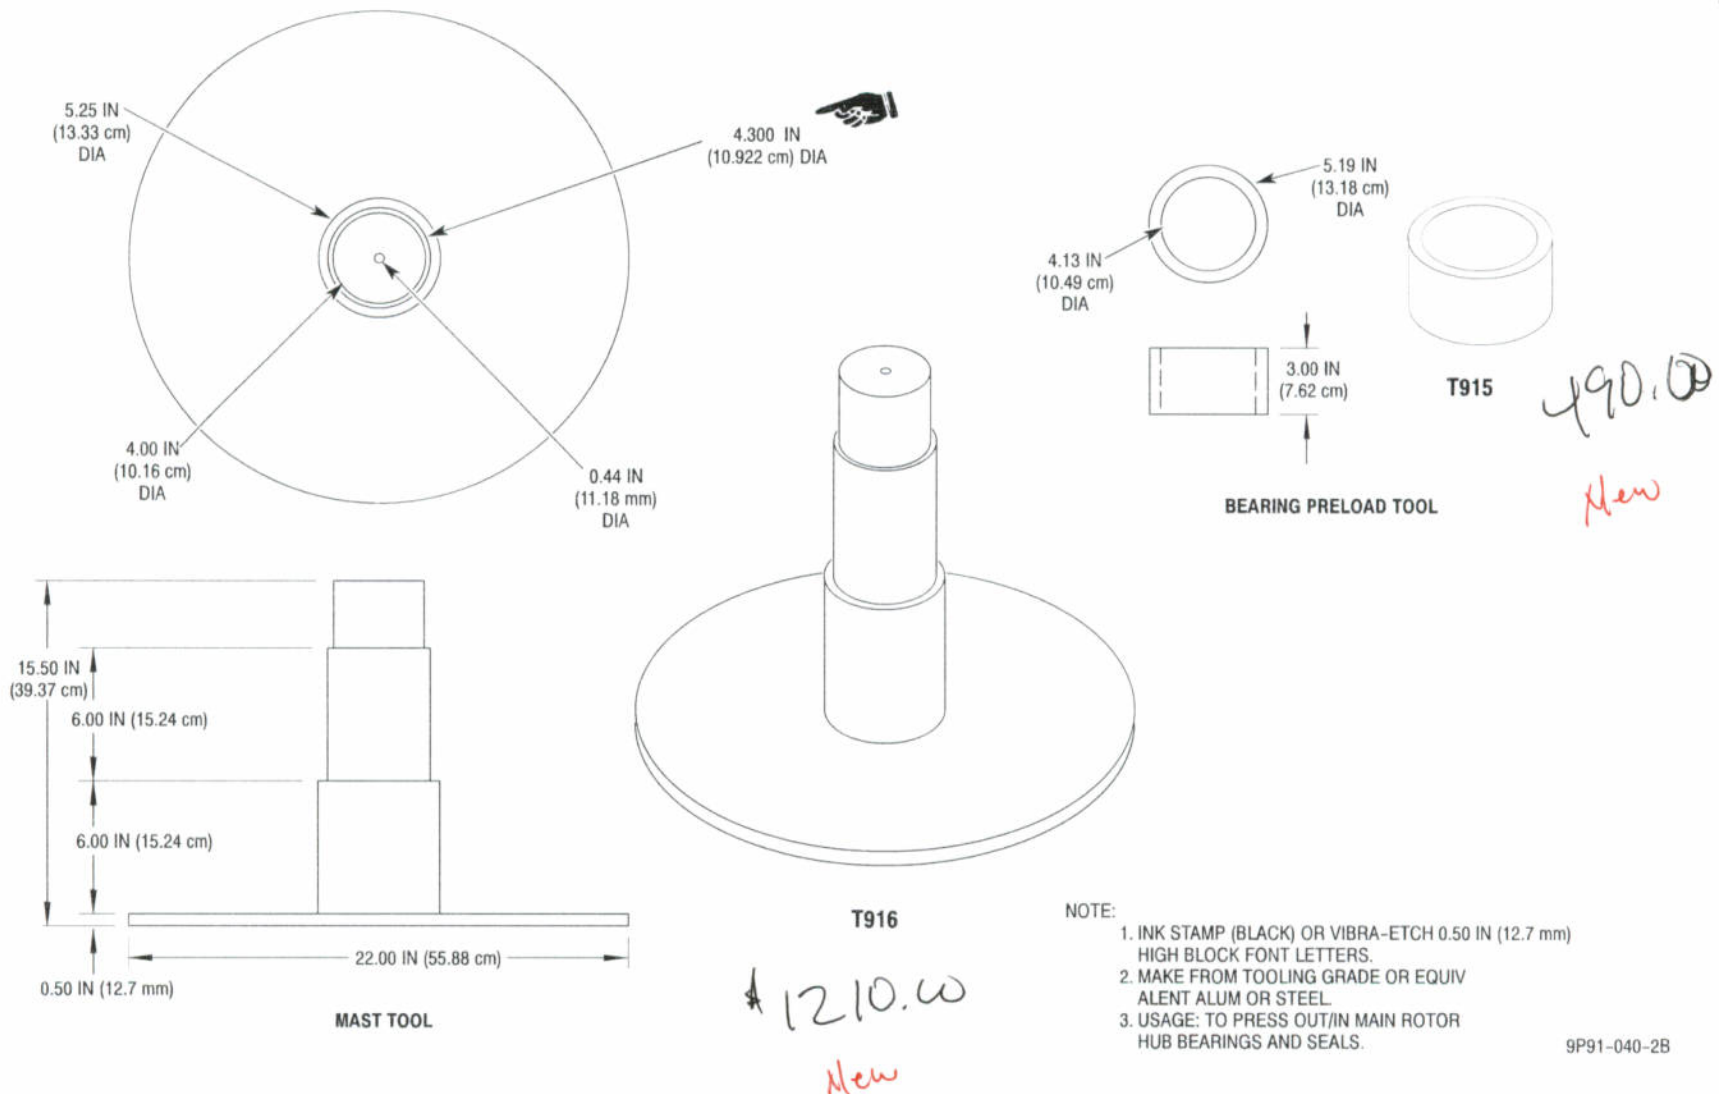


Figure 18. Main Rotor Hub Details – Removal / Installation Tools (Sheet 2 of 3)

91-10-00

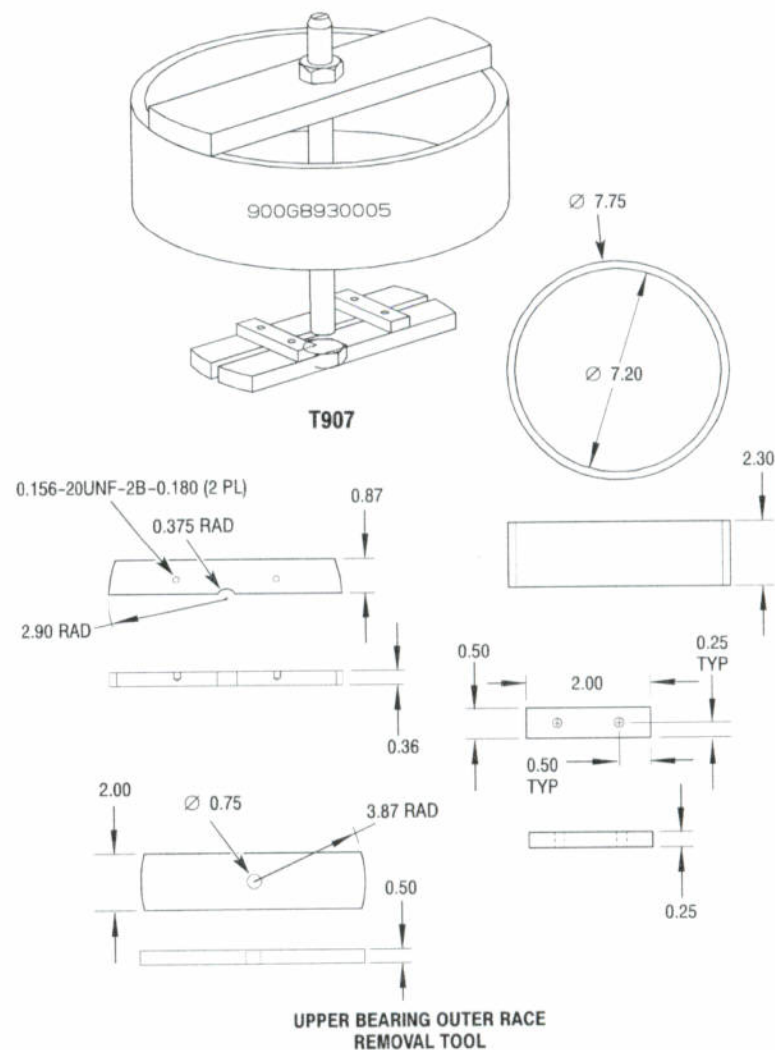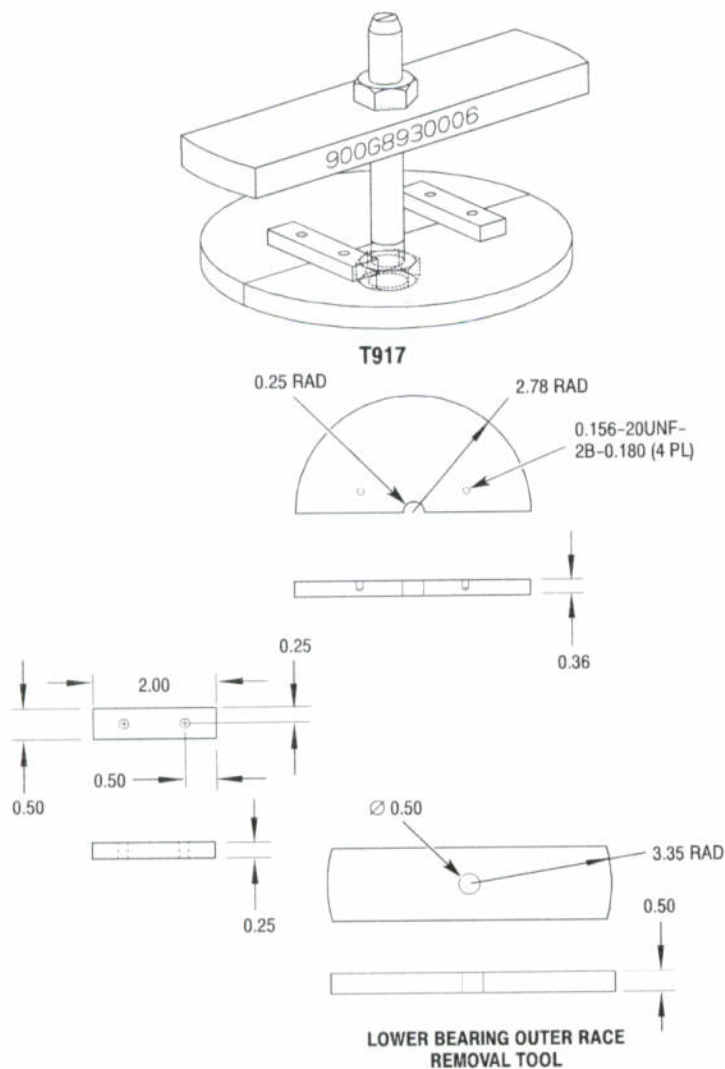

9P91-040-3

Figure 18. Main Rotor Hub Details – Removal / Installation Tools (Sheet 3 of 3)

91-10-00